

B Deck and N Deck for Elevated Platforms

Cornerstone Specialty Wood Products, LLC® provides corrugated metal deck products in a variety of profiles, thicknesses, yield strengths and finishes. The Engineers at Cornerstone Specialty Wood Products will help you optimize sizes, runs, steel thicknesses, corrugated profiles, and beam spacings, thus saving you time and money. To assist with the ease of installation we can even supply pre-punched B Deck and N Deck for use with our Invisi-Loc® underside fastening system.

Corrugated metal deck products are available in a variety of gauges and finishes. A bright white underside is available for excellent light reflectivity, but gray primer, galvanized or stainless steel is also available. We recommend that a minimum of 20 gauge metal B Deck and N Deck be used on all 3/4" ResinDek® flooring projects.



Corrugated Metal Decking Products

B Deck

We recommend that a minimum of 20 gauge metal B Deck be used on all 3/4" ResinDek® flooring projects and a minimum of 18 gauge when live and dead pallet jack loads exceed 2,500 lbs.


B Deck 1.5" Allowable Uniform Loads (PSF) / Loads That Produce L/240 Deflection

Number of Spans	Gauge	Min Yield (KSI)	36"	42"	48"	54"	60"	66"	72"	78"	84"	90"
Single	20	60	565 / 462	415 / 291	318 / 195	251 / 137	203 / 100	168 / 75	141 / 58	120 / 45	104 / 36	90 / 30
	18	60	792 / 658	582 / 414	445 / 278	352 / 195	285 / 142	236 / 107	198 / 82	169 / 65	145 / 52	127 / 42
	16	33	575*	422*	323*	255*	207 / 186	171 / 140	144 / 108	122 / 85	106 / 68	92 / 55
	20	60	563*	418*	322*	256*	208*	172*	145*	124 / 116	107 / 93	93 /75
Double	18	60	788*	586*	452*	359*	292*	242*	204 / 202	174 / 159	150 / 127	131 / 103
	16	33	552*	410*	317*	252*	205*	170*	143*	122*	105*	92*
Triple	20	60	692*	516*	399 / 388	317 / 273	258 / 199	214 / 149	180 / 115	154 / 91	133 / 72	116/59
	18	60	966*	722*	558 / 534	445 / 375	362 / 273	300 / 205	253 / 158	216 / 124	187 / 100	163 / 81
	16	33	676*	505*	391*	311*	254*	210*	177*	152*	131 / 128	114 / 104

NOTE: * Allowable Uniform Load shown only, L/240 Exceeds Allowable Load

B Deck 1.5" Physical Properties

		Weight (lb/ft2)				
Gauge	Thickness (in)	Painted	Galvanized			
20	.0358	2.1	2.2			
18	.0474	2.8	2.9			
16	.0598	3.4	3.5			

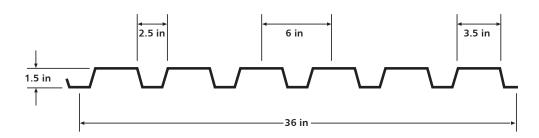



Installation is Fast and Easy

Cornerstone Specialty Wood Products provides installation drawings that includes detailed bill of materials, tag identification systems and location and placement of the B Deck and ResinDek® panels. Installation drawings are included with every bundle of materials shipped to your jobsite, eliminating the guesswork and keeping the job on schedule. All CAD layouts include a job specific itemized quote for: B Deck, fasteners, ResinDek® floor panels and freight.



RNERSTONE

12020 Tramway Drive, Cincinnati, OH 45241
Toll Free: 888.755.3048 | Tel: 513.772.5560
Email: info@resindek.com | www.resindek.com

Corrugated Metal Decking Products

N Deck

We recommend that a minimum of 20 gauge metal N Deck be used on all 3/4" ResinDek® flooring projects.


N Deck 3" Allowable Uniform Loads (PSF) / Loads That Produce L/240 Deflection

Number of Spans	Gauge	Min Yield (KSI)	84"	90"	96"	102"	108"	116"	120"	126"	132"	138"
	20	60	219 / 160	191 / 130	168 / 107	149 / 89	133 / 75	119 / 64	108 / 55	98 / 47	89 / 41	81 / 36
Single	18	60	325 / 236	283 / 192	249 / 158	220 / 132	196 / 111	176 / 94	159 / 81	144 / 70	132 / 61	120 / 53
	16	40	290*	253*	222*	197 / 186	175 / 157	157 / 133	142 / 114	129 / 99	117 / 86	107 / 75
Double	20	60	224*	209*	189*	168*	150*	135*	122*	111*	101*	92*
	18	60	349*	304*	268*	238*	213*	191*	173*	157*	143*	131*
	16	40	305*	266*	234*	208*	186*	167*	151*	137*	125*	114*
Triple	20	60	255*	238*	223*	208 / 192	186 / 161	167 / 137	151 / 118	137 / 102	125 / 88	115 / 77
	18	60	430*	378*	333 / 323	295 / 269	264 / 227	237 / 193	215 / 165	195 / 143	178 / 124	163 / 109
	16	40	378*	330*	291*	258*	231*	207*	187*	170*	155*	142*

NOTE: * Allowable Uniform Load shown only, L/240 Exceeds Allowable Load

N Deck 3" Physical Properties

Course	Thiskness (in)	Weight (lb/ft2)				
Gauge	Thickness (in)	Painted	Galvanized			
20	.0358	2.5	2.5			
18	.0474	3.2	3.3			
16	.0598	4.1	4.2			

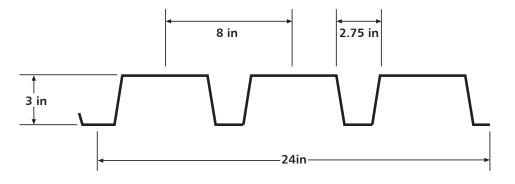



Installation is Fast and Easy

Cornerstone Specialty Wood Products provides installation drawings that includes detailed bill of materials, tag identification systems and location and placement of the N Deck and ResinDek® panels. Installation drawings are included with every bundle of materials shipped to your jobsite, eliminating the guesswork and keeping the job on schedule. All CAD layouts include a job specific itemized quote for: N Deck, fasteners, ResinDek® floor panels and freight.



SPECIALTY WOOD PRODUCTS, LLC[®] Email: info@resindek.com | www.resindek.com